
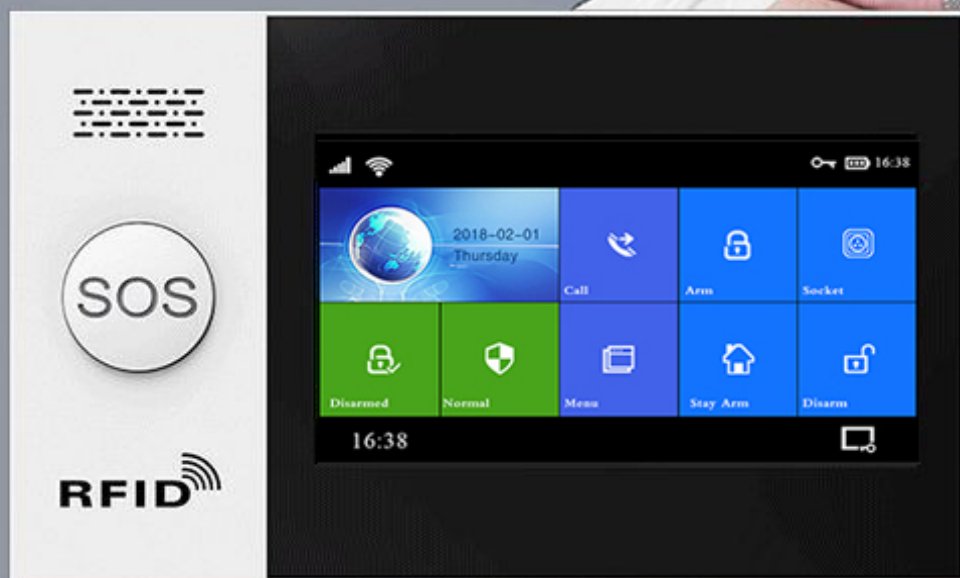


Intrusion Detection System

Residential & Commercial Alarm System

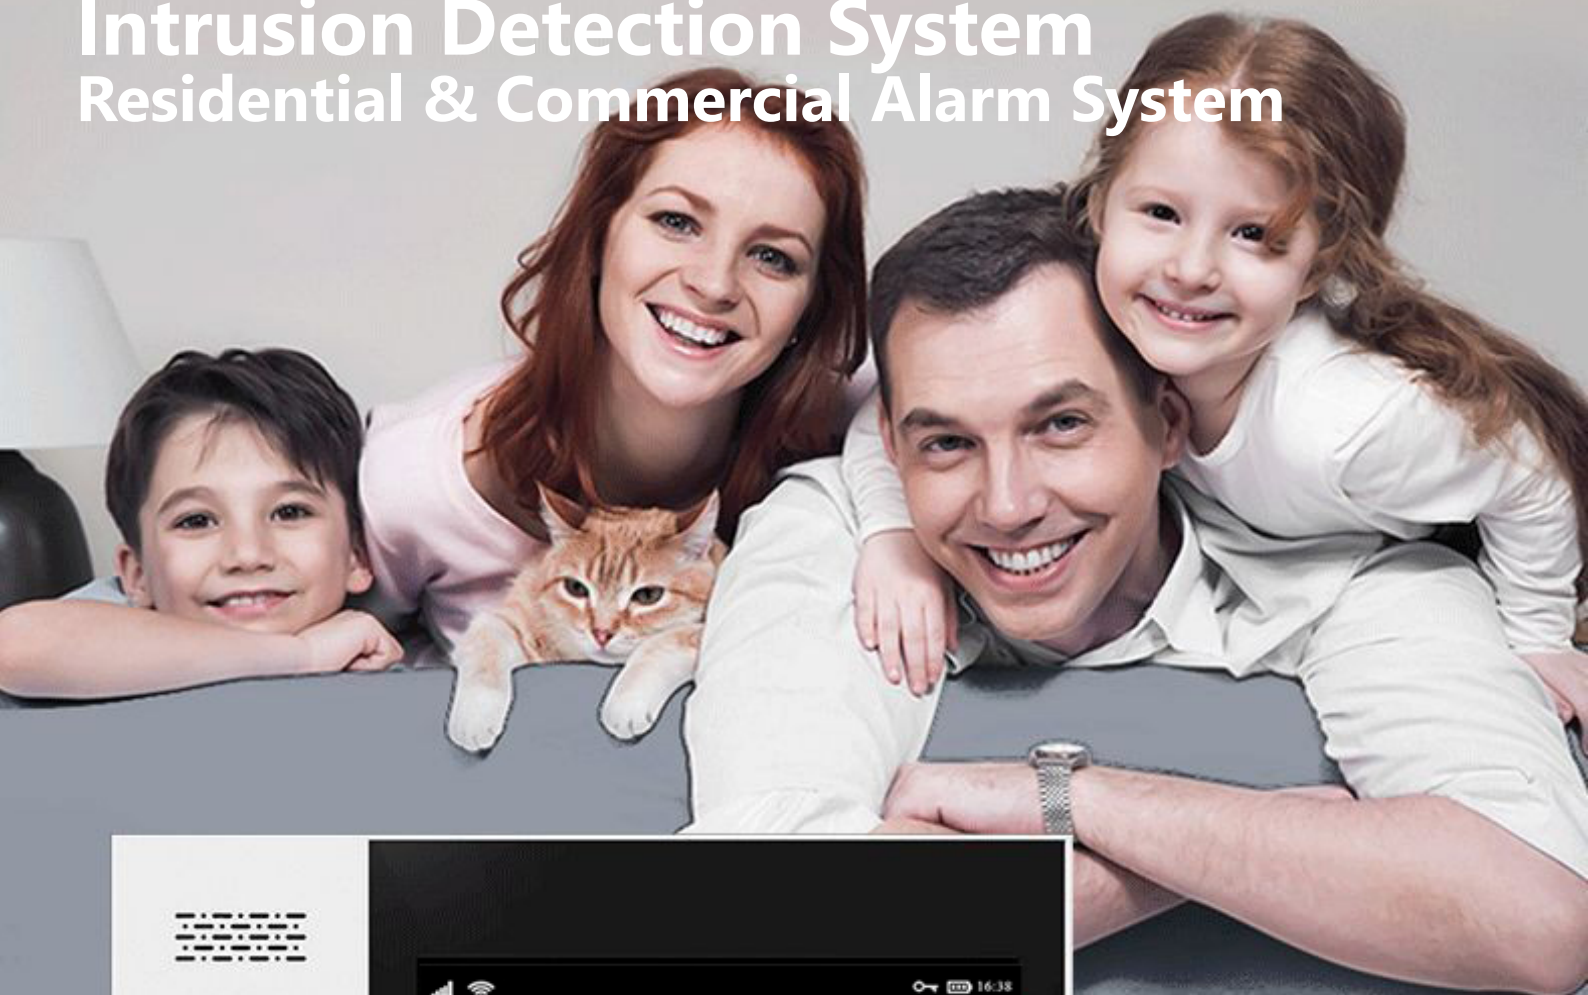

INTRUSION

Intrusion

Intrusion and break-in is the first priority for your business. Our security alarm systems adopts the latest intrusion motion sensor, perimeter sensors, as well as security cameras, to keep bad guys out.



FIRE

Fire

Avoid the nightmare of fire disaster, pre-alarm before spread of fire through your home is another crucial functions of our security alarm systems. Protect your home away from fire disaster.



FLOOD

Flood


Want to get informed and pre-alarmed, when the water leak into your basement or house? Water leak sensor send alarm message, when contact the water.



CO

CO

Today's security no longer only provides intrusion & fire protection. Work with CO detectors, the alarm system can protect your family away from toxic gas.

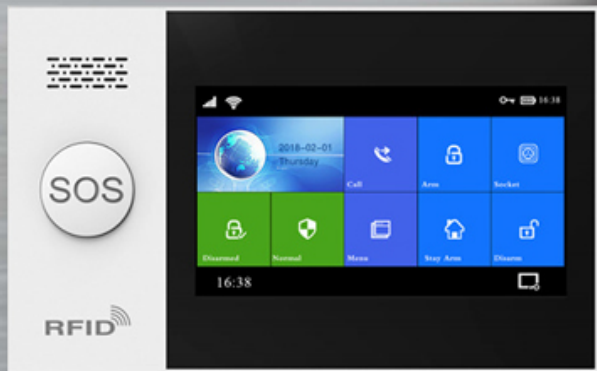

G107

G107 is the modern wireless residential and commercial alarm system that suitable for your home and business. This system is designed to meet the growing need for integrated security systems that combined with intrusion detection, detection of hazardous conditions such as fire and gas leaks.

Main Features:

- Powered by Tuya IoT platform
- Self-contained alarm panel with touchscreen
- 4.3" color LCD design for user-friendly operation
- Built-in GSM / 4G LTE cellular communicator
- 99 wireless zones plus 4 wired zones
- 2.4G Wi-Fi communication
- Alarm notification via phone call or SMS
- Instant push notification
- RFID function
- Free smartphone App (Android and iOS)



What's in the box:



Product Specification:

	Description
Model	G107
Zones	99 fully programmable wireless zones, 4 hardwired zones
Panel	Self-contained alarm panel
Display	4.3" inch color touch screen
Arming modes	Away Arm, Stay/Home Arm
Communication	Wi-Fi + GSM/4G cellular network
Preset numbers	Can preset 5 phone numbers
Alarm report	Push notifications auto-dialing call and text message
Maximum sensors	100 pieces wireless sensors (intrusion, fire, panic, water leak); unlimited wired sensors
Smart zone	Support smart zone function, automatically check the status of doors/windows
RFID	Support 10 RFID keychains
Two-way Com.	Support two-way voice communication
Event log	100 alarm event log; 100 operation event log
Voice message	Can record up to 20 seconds voice message
Siren output	12V DC 400mA siren output
Alarm output	N.O dry contact relay output
GSM frequency	850/900/1800/1900MHz
4G	LTE (American version / European version)
Wi-Fi	IEEE802.11 b/g/n
Wireless frequency	433MHz / 868MHz (optional)
Wireless range	>= 100 meters (open space)
Power supply	5V DC 1000mA
Backup battery	Rechargeable Lithium-ion 3.7V 500mAH
Standby time	>= 12 hours
Working condition	-30°C~+60°C / Less than 95%RH (no condensation)



Burglaryalarmssystem.com



SO-516R
Wireless Outdoor Strobe Siren

- Working with alarm panel or independently
- DC12V power input
- 20 wireless zones work with wireless security detectors
- Working with up to 5 remote key-fobs anti-tamper switch
- 110dB piezo siren
- 12 pieces LED strobe lights
- Audible and visual deterrent
- Away arm/stay arm
- AAA Ni-HM rechargeable battery pack
- Standby current: $\leq 7\text{mA}$
- Alarm current: $\leq 230\text{mA}$
- Wireless frequency: 433MHz
- Backup battery: AAA 7.2V
- Ingress protection: IP54



SO-519
Wireless Indoor Strobe Siren

- Working with alarm panel or independently
- DC5V microUSB power input
- 20 wireless zones work with wireless security detectors
- Working with up to 5 remote key-fobs
- Anti-tamper switch design
- 80dB piezo siren
- LED strobe lights
- Audible and visual deterrent
- Away arm/stay arm
- Lithium-ion rechargeable battery
- Standby current: $\leq 13\text{mA}$
- Alarm current: $\leq 230\text{mA}$
- Wireless frequency: 433MHz
- Backup battery: 3.7V 400mAH
- Ingress protection: N/A



SO-520
Solar Powered Outdoor Siren

- Work with alarm panels or independently
- Built-in 3.7V 1200mA Lithium-ion battery
- 20 wireless zones work with wireless security detectors
- Working with up to 5 remote key-fobs
- Anti-tamper switch design
- 110dB piezo siren
- LED strobe lights
- Audible and visual deterrent
- Away arm/stay arm
- Lithium-ion rechargeable battery
- Standby current: $\leq 13\text{mA}$
- Alarm current: $\leq 230\text{mA}$
- Wireless frequency: 433MHz
- Backup battery: 3.7V 1200mAH
- Ingress protection: IP65





WH-92R
Wireless PIR Motion Sensor

- Working voltage: 3V AAA*2 alkaline battery
- Working current: $\leq 25\text{mA}$
- Static current: $\leq 30\mu\text{A}$
- Emission frequency: 433MHz
- Emission power: $\leq 10\text{dB}$
- Emission distance: $\geq 80\text{m}$ (open space)
- Detecting distance: 8m~12m (25 °C)
- Working temperature: -10 °C~55 °C
- Installation: wall
- Installation height: 1.8~2.2m
- Detecting angle: 110°



YG-603
Wireless Smoke&Heat Detector

- Smoke & heat detection for fire pre-alarming
- Battery type: DV9V 6F22
- Static current: $\leq 10\mu\text{A}$,
- Working current: $\leq 60\text{mA}$
- Detection range: 20 square meters
- Heat threshold: 50 Celsius degree
- Buzzer: 85dB piezo
- Wireless frequency: 433MHz
- Wireless distance: 120 meters
- Environment: -10 °C~60 °C
- Installation: ceiling mounted
- Battery life: 12 months



YH-06
Wireless CO Detector

- Low power consumption technology
- Battery type: DC9V 6F22 battery
- Static current: $\leq 50\mu\text{A}$,
- Working current: $\leq 50\text{mA}$
- Carbon monoxide: 300PPM, 3 minutes to set off
- Carbon monoxide: 100PPM, 10-40 minutes to set off
- Carbon monoxide: 50PPM, 60-90 minutes to set off
- Working temperature: -10°C~+50°C
- Buzzer: 86dB
- Low voltage alert: ≤ 6





MC-68
Wireless Magnetic Contact

- Wireless door/window sensor
- Power input: DC3V (CR2450 button battery)
- Working current: $\leq 20\text{mA}$
- Static current: $\leq 8\mu\text{A}$
- Emission frequency: 433MHz
- Emission power: $\leq 10\text{dB}$
- Emission distance: $\geq 120\text{m}$ (open space)
- Triggering distance: 25-35mm
- Working temperature: $-10^{\circ}\text{C}\sim 55^{\circ}\text{C}$
- Installation: screws or double sided tape



JY-12
Wireless SOS Button

- Summon aid in an emergency or duress
- Working voltage: DC3V CR2450 button battery
- Static current: $\leq 10\text{mA}$
- Working current: $\leq 15\text{mA}$
- Wireless frequency: 433MHz
- Wireless range: ≤ 100 meters (open space)
- Working temperature: $-10^{\circ}\text{C}\sim +50^{\circ}\text{C}$
- Installation: double sided tape



ES-626
Wired Horn/Siren

- Working voltage: 6-15V DC
- Rated voltage: 12V DC
- Static current: N/A
- Working current: $\leq 320\text{mA}$
- Sound volume: 105dB
- Maximum power: 15Watt
- Working temperature: $-10^{\circ}\text{C}\sim +50^{\circ}\text{C}$
- Installation: screws



YK-50
Wireless Remote Control

- Wireless remote control
- Disarm, stay arm. away arm. SOS
- Working voltage: DC3V (CR2450 button battery)
- Working current: $\leq 20\text{mA}$
- Static current: $\leq 8\mu\text{A}$
- Emission frequency: 433MHz
- Emission power: $\leq 10\text{dB}$
- Emission distance: $\geq 120\text{m}$ (open space)
- Working temperature: $-10^{\circ}\text{C}\sim 55^{\circ}\text{C}$

